

"The World's Largest Selling Lawn and Garden Riding Tractor"

The

BANTAM TRACTOR



THE BANTAM TRACTOR

HIGH—LOW—REVERSE GEAR TRANSMISSION

AVAILABLE IN THREE, FIVE AND EIGHT H.P.

*Falls Products Co.
Genoa, Illinois*

THE NEW IMPROVED BANTAM TRACTORS FOR 1956 ARE THE FINEST,
MOST POWERFUL IN THEIR FIELD.

Precision engineered, standardized parts, attachments built to work.

BANTAM MANUFACTURING CORPORATION, Indianapolis, Indiana

WORK IS EASY... WO


BANTAM TRACTORS

BANTAM TRACTOR SPECIFICATIONS

	①	②	③
	Model 3000 3 H.P.	Model 5000 5 H.P.	Model 8000 8 H.P.
LENGTH	50"	50"	67"
WIDTH Across rear wheel	30"	30"	30"
HEIGHT To top of steering wheel	30"	30"	38"
HEIGHT To top of hood	26 1/2"	26 1/2"	34"
CLEARANCE Under tractor	4 1/2"	4 1/2"	5 1/2"
WEIGHT	345 lbs.	291 lbs.	610 lbs.
SHIPPING WT.	310 lbs.	340 lbs.	640 lbs.
REAR TIRES	4" x 8" Pneumatic	5" x 8" Goodyear	6" x 12" Sure-Grips
FRONT TIRE	3 1/2" x 6" Pneumatic	2 1/2" x 6" Pneumatic	4 1/2" x 7" Pneumatic
ENGINE	Briggs & Stratton 99B-3 H.P., 148B-5 H.P., 22FB-8 H.P.		
TRANSMISSION	Automatic Type— High, Low and Reverse Gears		
DIFFERENTIAL	Automatic Type— Worm Drive		
REAR AXLES	Oilite Bearings (require no lubrication).		
COLOR	Orange and Black		
CLUTCH	3 & 5 H.P.—Ball-Lok V-Belt 8 H.P.—Edgemont 2-face friction		

DATA ON BANTAM TRACTOR ATTACHMENTS

- ④ **Deluxe Size Dump Truck**
16 gauge all-steel body, water-tight.
48" long, 36" wide, 9" deep.
Breaks of bed are made to give added strength.
2 wheels 3.50" x 6.00" Pneumatic.
Oilite Bearings.

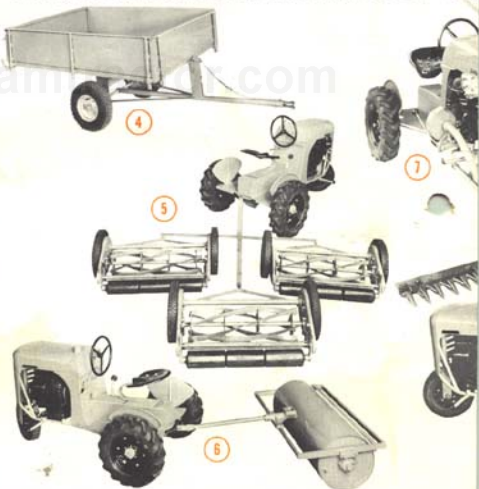


BANTAM MANUFACTURING CORPO

WORK IS FAST WITH THE


AND THEIR ATTACHMENTS



5 H. P.
BANTAM TRACTOR




8 H. P.
BANTAM TRACTOR

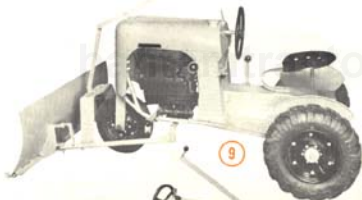

9



8

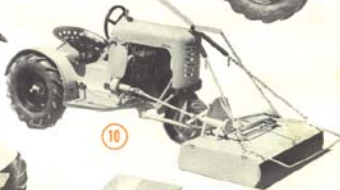

10



5 Gang Mowers

Reel-type gang mowers available in 2 to 5 gang units. Individual reels in 20" or 25" widths, five bladed, ball bearing with quick adjusting bed knife. All steel—indestructible. 3 inch, 3 section roller with 4 inch maximum height of cut adjustment. Flexible gang frame allows mowers to follow ground contour.

6 Roller

Roller drum 1/2" steel with end filler plug for water weight. 36" wide—13" outside diameter. New departure ball bearings with zerk fittings. Welded steel tubing frame and tongue. Weight, 300 lbs. when filled with water.

7 Sickle Bar

36" swath. Cutting height adjustable to 6". Fitman Rod with ball bearings. Cutting bar extends 14 inches in front of tractor. Attaches to tractor with 2 bolts. Belt drive motor to bar. Controls within operator's reach.

8 Spiker

Double rows of 10" discs—10 discs to each row. Unit is 18" wide. Special feature permits lifting of spikes for transportation.

9 Snow Plow and Grader

Blade 1/2" steel 34" wide, 14" high. Attaches to tractor with 3 bolts. Blade adjustable for left or right movement of snow—straight for earth moving. Handle provided for raising, lowering blade.

10 Front Rotary Mower

For 5 H.P. Special Bantam Tractor. Cuts 34" wide swath. Operates from tractor motor with belt driven drive shaft. Ideally suited for heavy and high growth. Controls easy for operator to reach. 40" unit available for 8 H.P. unit only.

DISTRIBUTION, INDIANAPOLIS, INDIANA

11 Underneath Mount Rotary

Fits 3 and 5 H. P. tractor. Cuts 28" width swath. For normal stand of grass. Easily mounted to tractor—drives from tractor motor.



11



12

12 Underneath Mount Cultivator

Speeds cultivation with greater control and more positive action. Breaks earth to a normal cultivation depth. Lever at side of operator locks blades in either raised or lowered position.



13



14

13 Row Crop Front Wheels

Optional feature, available as original equipment and in conversion kit for previous models of Bantam tractors.

Designed for better steerability in ground tilling. This assembly increases traction and feasibility in soft or sandy soil.

14 Sweeper

28" wide, 10" diameter wheels with 10" x 1 1/2" solid rubber tires. Sectional fiber brush adjustable to 3" from ground. Green water-proof canvas sides. Sweeps leaves, grass cuttings, twigs, bark, etc. Front guard adjustable to bulky sweepings. Hitch design permits easy dumping.



15



16

15 Lawn Spreader and Seeder

Width 36". Capacity 100 lbs. Fertilizer or Turf Builder. Can be set for both seeding and turf builder. 3 solid tires 12.00" x 2.00". Controls easily reached.

16 Disc

27" wide, 8-12" discs can be set at any angle without tools. Frame of steel bars and tubing.

17 Transmission

Automotive types—2 speeds forward and reverse. Standard gear shift lever operated. Ball and needle type bearings. Hub cut, case hardened gears run immersed in oil-tight gear box. Guaranteed for one year.

18 Differential

Automotive-type worm drive. Delivers power through both rear wheels. Provides maximum traction and short turns. Hub cut, case hardened gears run immersed in oil. Ball bearing alignment. Oilite rear axle bearings require no lubrication. Guaranteed for one year.



17



18

OTHER ATTACHMENTS

Mold Board Plows

Disc Plow

Front Mount Cultivator

Rear Mount Cultivator

Lawn Aerator

Dual Rear Wheels

Rear Wheel Weights

Front End Weights

Tire Chains

Various Type Trailers

BANTAM MANUFACTURING CORPORATION

3448 Shelby St., P. O. Box 554

Indianapolis 6, Indiana

PRINTED
IN U.S.A.

FORM BT-581